

## Faratherm Induction Base Heater

Provides heat to the base of steel or plastic 205 litre drums and smaller containers.

May be used individually, or with other LMK Heating products.

Uses the same technology as the proven Thermosafe Induction Heater

Suitable for use in Zone 1 & 2 rated hazardous areas (ATEX and IECEx Certified)

The Faratherm Induction Base Heater consists of an induction coil, encapsulated in glass reinforced resin with a heating plate located on top. It has been developed using the same technology as the Thermosafe Induction Heater - a very reliable and efficient product in use worldwide for over 20 years. Powered by a single phase ac mains supply, it will heat the base of drums and containers placed onto it.



The Faratherm is safe to use in hazardous areas (zones 1 and 2). It is fully certified to meet both ATEX and IECEx requirements. With an ingress protection rating of IP66 and no moving parts, it is suitable for use in harsh environments or where regular cleaning is required.




The plate is heated by induction and therefore there are no heating elements. The maximum temperature is self limiting - this is governed by the material being heated and the heating arrangement. In most applications additional temperature regulation is not required, however control options are available, please ask for more information.



Drums and containers up to 205 Litres may be heated. Plastic, steel or stainless steel are all suitable.

The Faratherm will heat drums and containers by itself. However for reduced heating times it can also be used with an LMK insulated jacket, or the Thermosafe Induction Heater, with or without a “top-hat” (Certified “T” ratings may vary). Testing has shown that the addition of a Faratherm when using a Thermosafe to melt a solid or wax will significantly shorten the heating time. A 40% time reduction for a full drum of wax to be melted to 80°C has been recorded.

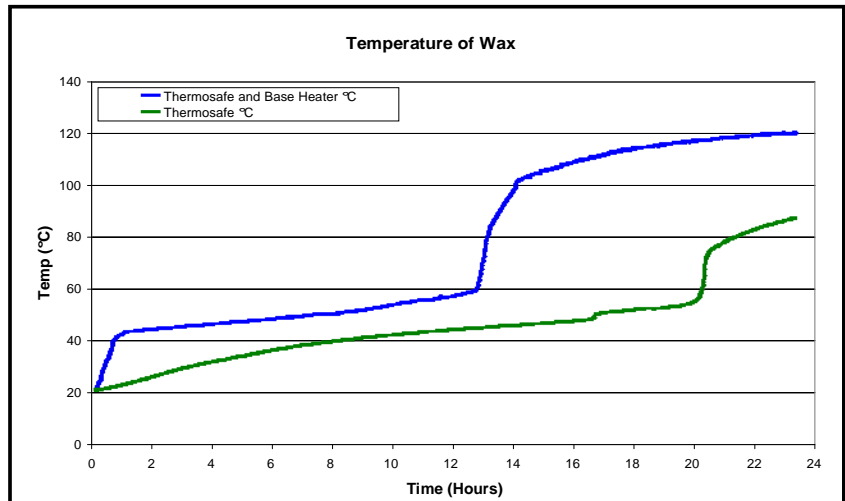

Temperature of Wax measured at hardest to heat location (base of drum in centre)

**Product Specification**

Single Phase up to 240v, 50/60Hz ac  
 Current / power consumption: 7A / 500W  
 (Note: inductive power factor)

Heating Plate Dia: 550mm  
 Overall width: 887mm  
 Heating Plate Height: 59mm  
 Weight: 45kg

Class II Appliance  
 Ingress Protection IP66

Hazardous Area Certification.  
 Standards: EN 60079-0:2004, EN 60079-7:2003, IEC 61241-0:2004, EN 61241-1:2004  
 EC-Type Examination Certificate Number: Sira 07ATEX3034X  
 IECEx Examination Certificate Number: IECEx SIR 07.0017X



II 2 GD Ex e II T3 Ex e tD A21 IP66 T 200°C (Zones 1 and 2)



Biofuel Systems Group Limited. Registered in England. Registered Company number GB-05458942  
 Registered Office: 8 Leighton Road, Neston, Cheshire, England, CH64 3SD

